



THE NEXT LEVEL OF INNOVATION

ROOM AIR CONDITIONER CATALOGUE / 2024

**Rest
Assured**



**INDIA'S OWN.
INDIA'S FAVOURITE.**



Since 2012, Carrier has won the hearts of customers through advanced product solutions with global technology built in India. Manufacturing facility, located in Maharashtra, is responsible for creating the world-class quality products that our patrons love and trust, all while utilising state-of-the-art energy-saving technological practices. We continuously strive to keep our products up-to-date, while staying ahead of the curve in today's ever-changing tech landscape. Our main objective is to bring next-gen technology to every Indian household.





AT CARRIER, WE SAY

Rest Assured

We believe that with Carrier, you don't have to worry about anything. We are confident that we deliver exceptional quality products and the finest of services with them, and that is why you can trust us.

From the moment you have a Carrier product installed in your home, through time that product becomes a reliable feature in your household.

This is why our motto is **"Rest Assured"**.


CARRIER SMART CONNECT

A dynamic and proactive approach for enhanced equipment and system management, Carrier Smart Connect enables greater connectivity between the air conditioner, our service support team, and you. Equipped with WiFi connectivity, it is compatible with your Google Home and Alexa Home devices. You can also know the real-time status of the AC by connecting with customer care, using the app, if any error occurs.




HOW TO REGISTER A COMPLAINT ON CARRIER SMART CONNECT IN CASE OF AN ERROR:

STEP 1



Register your AC on the Carrier Wi-Fi-CMI app.

STEP 2




Tap on 'Me' and tap on 'Contact Us'.

STEP 3




Tap On 'Click Here To Register Complaint'.

STEP 4



Fill in the details of your complaint and send them.

NOTIFICATION



You will get a notification on the status of your complaint.



Scan the below QR code to download the Carrier Wi-Fi app



Android



iOS

CHANGE CAPACITY* AS PER YOUR COOLING NEEDS/WEATHER



Carrier

INSTA COOL



EXTREME HOT

1.7 Ton

Mode 120%

Carrier

FC5



VERY HOT

1.6 Ton

Mode 110%

Carrier

FC4



HOT

1.5 Ton

Mode 100%

Carrier

FC3



HUMID

1.25 Ton

Mode 75% - 80%

Carrier

FC2



PLEASANT

1.0 Ton

Mode 50% - 60%

Carrier

FC1



COMFY PLEASANT

0.8 Ton

Mode 40%



6-IN-1 AC WITH FLEXI COOL HYBRIDJET TECHNOLOGY

We believe that technology must adapt to human requirements and not the other way around. That's why Carrier ACs come with Flexicool technology. It means that apart from adjusting the AC's cooling performance you can also change the energy consumption of the AC as per your requirement.



HERE ARE 6 COOLING CAPACITY ADJUSTMENTS





INVERTER

— ACs —





XCEL SERIES

EXCELLENT IN COOLING,
EXCEPTIONAL IN TECH.



6-IN-1 AC WITH **FLEXI COOL**
INVERTER TECHNOLOGY



SMART
ENERGY DISPLAY

**INDIA'S FIRST
X-LINE
LED DESIGN**
REGISTERED UNDER
INTELLECTUAL PROPERTY INDIA
398592-001

Available in*  1TR/1.5TR/2TR  1TR/1.5TR/2TR

Variant available **Xcel Edge (without LED)**

Carrier Care: 1800 103 3333

**Rest
Assured**



XCEL LUMO Exi Wifi

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC

WITH FLEXI COOL
INVERTER TECHNOLOGY



0.8 kW

SMART
ENERGY DISPLAY



JUST ASK
alexa

works with the
Google Assistant



6 modes,
up to 50% energy
saving.



0.8 kW
SMART ENERGY
DISPLAY
Shows real power
consumption.



AUTO
CLEANSER
Disinfects and
cleans the indoor
unit.



INSTA COOL
Instant cooling with
a single click.



CARRIER
SMART CONNECT
WiFi enabled / Voice
controlled via Alexa
and Google.



INTELLIGENT
CRF ALERT
Notifies you to
clean filters.



HYBRID JET
TECHNOLOGY*
Works in high
temperature up to 55°C.
*Patented technology




HYDRO
BLUE COATING*
Protects coil and fin
against corrosion and
increases durability.



Hidden
Display



Air Directional
Control



Auto
Restart



Stabilizer Free
Even At 48 Degrees*




Refrigerant Leakage
Detector



High Air Flow
CFM - 700*



Auto On/Off
Timer



Backlit
Remote



Follow Me



CAI12CL5R34W0



CAI18CL5R34W0



CAI24CL5R34W0

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6580
	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840/334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





XCEL LUMO Exi

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC WITH **FLEXI COOL**
INVERTER TECHNOLOGY



6-IN-1 AC
WITH
FLEXI COOL
INVERTER TECHNOLOGY
6 modes,
up to 50% energy
saving.



0.8 kW
**SMART ENERGY
DISPLAY**
Shows real power
consumption.



**AUTO
CLEANSER**
Disinfects and
cleans the indoor
unit.



INSTA COOL
Instant cooling with
a single click.



**INTELLIGENT
CRF ALERT**
Notifies you to
clean filters.



**HYBRID JET
TECHNOLOGY***
Works in high
temperature up to 55°C.
*Patented technology




**HYDRO
BLUE COATING***
Protects coil and fin
against corrosion and
increases durability.



Hidden
Display



Air Directional
Control



Auto
Restart




Stabilizer Free
Even At 48 Degrees*




Refrigerant Leakage
Detector



High Air Flow
CFM - 700*



Auto On/Off
Timer



Backlit
Remote



Follow Me



CAI12CL3R34FO



CAI18CL3R34FO



CAI24CL3R34FO

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5050/2525	6300/3150
	Power Input - Full / Half (W)	1055/443	1590/615	2000/765
	Annual Power Consumption (kWh)	694.06	999.69	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.85	3.91	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





XCEL EDGE Exi Wifi

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC

WITH FLEXI COOL
INVERTER TECHNOLOGY



0.8 KW

SMART
ENERGY DISPLAY



JUST ASK
alexa


works with the
Google Assistant



6 modes,
up to 50% energy
saving.



0.8 KW
SMART ENERGY
DISPLAY
Shows real power
consumption.



AUTO
CLEANSER
Disinfects and
cleans the indoor
unit.



INSTA COOL
Instant cooling with
a single click.



CARRIER
SMART CONNECT
WiFi enabled / Voice
controlled via Alexa
and Google.



INTELLIGENT
CRF ALERT
Notifies you to
clean filters.



HYBRID JET
TECHNOLOGY*
Works in high
temperature up to 55°C.
*Patented technology



HYDRO
BLUE COATING*
Protects coil and fin
against corrosion and
increases durability.



Hidden
Display



Air Directional
Control



Auto
Restart



Stabilizer Free
Even At 48 Degrees*



Refrigerant Leakage
Detector



High Air Flow
CFM - 700*



Auto On/Off
Timer



Backlit
Remote



Follow Me



CAI12CE5R34W0/4FO



CAI18CE5R34W0/4FO



CAI24CE5R34W0/4FO

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6580
	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840/334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply: 700 CFM only applicable on 2 TR model. Stabilizer free operation range: 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





XCEL EDGE Exi 3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC

WITH FLEXI COOL
INVERTER TECHNOLOGY



0.8 kW
SMART
ENERGY DISPLAY



6 modes,
up to 50% energy
saving.



0.8 kW
SMART ENERGY
DISPLAY
Shows real power
consumption.



AUTO
CLEANSER
Disinfects and
cleans the indoor
unit.



INSTA COOL
Instant cooling with
a single click.



INTELLIGENT
CRF ALERT
Notifies you to
clean filters.



HYBRID JET
TECHNOLOGY*
Works in high
temperature up to 55°C.
*Patented technology




HYDRO
BLUE COATING*
Protects coil and fin
against corrosion and
increases durability.



Hidden
Display



Air Directional
Control




Auto
Restart



Stabilizer Free
Even At 48 Degrees*



Refrigerant Leakage
Detector



High Air Flow
CFM - 700*



Auto On/Off
Timer



Backlit
Remote



Follow Me



CAI12CE3R34FO



CAI18CE3R34FO



CAI24CE3R34FO

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5050/2525	6300/3150
	Power Input - Full / Half (W)	1055/443	1590/615	2000/765
	Annual Power Consumption (kWh)	694.06	999.69	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.85	3.91	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





POWERFUL COOLING WITH CUTTING-EDGE TECHNOLOGY

**XTREME
SERIES**



Peak performance
5910W*



1000mm platform
for instant cooling



India's first AC with
futuristic LED light



Available in#



1TR / 1.5 TR



1.5 TR

Variant available:

Xtreme Edge (without LED)

Carrier Care: 1800 103 3333

*Maximum cooling capacity of 18K-5 star inverter

**Rest
Assured**

*T&C Apply



XTREME LUMO EXI

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC WITH **FLEXI COOL**
INVERTER TECHNOLOGY



AUTO CLEANSER

Disinfects and cleans the indoor unit.



HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.
*Patented technology



HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



6-IN-1 AC WITH **FLEXI COOL**
INVERTER TECHNOLOGY
6 modes, up to 50% energy saving.



INSTA COOL

Instant cooling with a single click.



INTELLIGENT CRF ALERT

Notifies you to clean filters.



High Air Flow
CFM - 715*



Auto On/Off
Timer



Stabilizer Free
Even At 48 Degrees*



Auto
Restart



Refrigerant Leakage
Detector



Hidden
Display



Backlit
Remote



Air Directional
Control



Follow Me



CAI12XLSR33F0



CAI18XLSR34F0

	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5910
	Cooling Capacity - Full / Half (W)	3450/1725	5200/2600
	Power Input - Full / Half (W)	850/323	1290/475
	Annual Power Consumption (kWh)	529.28	789.6
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.1
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4

*T&C Apply. 695 CFM only applicable on 1 TR & 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





XTREME LUMO EXI

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC WITH **FLEXI COOL**
INVERTER TECHNOLOGY



AUTO CLEANSER

Disinfects and
cleans the indoor
unit.



HYBRID JET TECHNOLOGY*

Works in high
temperature up to 55°C.
*Patented technology



HYDRO BLUE COATING*

Protects coil and fin
against corrosion and
increases durability.



6-IN-1 AC WITH FLEXI COOL

6 modes,
up to 50% energy
saving.



INSTA COOL

Instant cooling with
a single click.



INTELLIGENT CRF ALERT

Notifies you to
clean filters.



High Air Flow
CFM - 715*



Auto On/Off
Timer



Stabilizer Free
Even At 48 Degrees*



Auto
Restart



Refrigerant Leakage
Detector



Hidden
Display



Backlit
Remote



Air Directional
Control



Follow Me



CAI12XL3R34FO



CAI18XL3R34FO



CAI24XL3R34FO

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5150/2575	6300/3150
	Power Input - Full / Half (W)	1065/430	1610/650	2000/765
	Annual Power Consumption (kWh)	685.59	1036.39	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.9	3.85	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 715 CFM only applicable on 1.5 TR & 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





XTREME EDGE EXI

5 Star Inverter Series

Available Variant | 1 TR, 1.5 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC

WITH FLEXI COOL
INVERTER TECHNOLOGY



AUTO CLEANSER

Disinfects and
cleans the indoor
unit.



HYBRID JET TECHNOLOGY*

Works in high
temperature up to 55°C.
*Patented technology



HYDRO BLUE COATING*

Protects coil and fin
against corrosion and
increases durability.



6-IN-1 AC WITH FLEXI COOL

6 modes,
up to 50% energy
saving.



INSTA COOL

Instant cooling with
a single click.



INTELLIGENT CRF ALERT

Notifies you to
clean filters.



High Air Flow
CFM - 715*



Auto On/Off
Timer



Stabilizer Free
Even At 48 Degrees*



Auto
Restart



Refrigerant Leakage
Detector



Hidden
Display



Backlit
Remote



Air Directional
Control



Follow Me



CAI12XE5R33F0



CAI18XE5R34F0

	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5910
	Cooling Capacity - Full / Half (W)	3450/1725	5200/2600
	Power Input - Full / Half (W)	850/323	1290/475
	Annual Power Consumption (kWh)	529.28	789.6
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.1
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4

*T&C Apply. 695 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





XTREME EDGE EXI

3 Star Inverter Series

Available Variant | 1 TR, 1.5 TR & 2 TR



6-in-1
FlexiCool
Remote



6-IN-1 AC

WITH FLEXICOOL
INVERTER TECHNOLOGY



AUTO CLEANSER

Disinfects and
cleans the indoor
unit.



HYBRID JET TECHNOLOGY*

Works in high
temperature up to 55°C.
*Patented technology



HYDRO BLUE COATING*

Protects coil and fin
against corrosion and
increases durability.



6-IN-1 AC WITH FLEXICOOL

6 modes,
up to 50% energy
saving.



INSTA COOL

Instant cooling with
a single click.



INTELLIGENT CRF ALERT

Notifies you to
clean filters.



High Air Flow
CFM - 715*



Auto On/Off
Timer



Stabilizer Free
Even At 48 Degrees*



Auto
Restart



Refrigerant Leakage
Detector



Hidden
Display



Backlit
Remote



Air Directional
Control



Follow Me



CAI12XE3R34FO



CAI18XE3R34FO



CAI24XE3R34FO

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5150/2575	6300/3150
	Power Input - Full / Half (W)	1065/430	1610/650	2000/765
	Annual Power Consumption (kWh)	685.59	1036.39	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.9	3.85	3.9
	Valve Size (inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 715 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





Indus EXi Smart

5 Star Inverter Series

Available Variants | 1 TR, 1.5 TR & 2 TR



DESIGNED
IN INDIA.
MADE IN
INDIA.



FLEXI COOL
HYBRIDJET TECHNOLOGY



0.8kw

SMART
ENERGY DISPLAY



6-IN-1 AC

WITH
FLEXI COOL

HYBRIDJET TECHNOLOGY

6 modes,
up to 50% energy
saving.



0.8kw

SMART
ENERGY
DISPLAY

Shows real power
consumption.



INSTA COOL

Instant cooling with
a single click.



AVG

ANTI-VIRAL GUARD*

Protects against air
borne viruses, bacteria,
and germs.



CARRIER

SMART CONNECT

WiFi enabled / Voice
controlled via Alexa
and Google.



HYBRID JET

TECHNOLOGY*

Works in high
temperature up to 55°C.
*Patented technology



HYDRO

BLUE COATING*

Protects coil and fin
against corrosion and
increases durability.



Hidden
Display



Air Directional
Control



Auto
Restart




Stabilizer Free
Even At 48 Degrees*



Refrigerant Leakage
Detector



High Air Flow
CFM - 700*



Auto On/Off
Timer



Backlit
Remote



Follow Me



CAI12IN5R34W0



CAI18IN5R34W0



CAI24IN5R34W0

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5910	6580
	Cooling Capacity - Full / Half (W)	3500 / 1750	5230/2615	6000/3000
	Power Input - Full / Half (W)	840 / 334	1290/475	1500/555
	Annual Power Consumption (kWh)	536.2	789.6	920.55
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





Indus EXi

3 Star Inverter Series

Available Variants | 1 TR, 1.5 TR & 2 TR



DESIGNED
IN INDIA.
MADE IN
INDIA.



FLEXI COOL
HYBRIDJET TECHNOLOGY



6-IN-1 AC

WITH
FLEXI COOL

HYBRIDJET TECHNOLOGY

6 modes,
up to 50% energy
saving.



0.8kW

SMART
ENERGY
DISPLAY

Shows real power
consumption.



AVG

ANTI-VIRAL GUARD*

Protects against air
borne viruses, bacteria,
and germs.



INSTA COOL

Instant cooling with
a single click.



**HYBRID JET
TECHNOLOGY***

Works in high
temperature up to 55°C.

*Patented technology



**HYDRO
BLUE COATING***


Protects coil and fin
against corrosion and
increases durability.



Hidden
Display



Air Directional
Control



Auto
Restart



Stabilizer Free
Even At 48 Degrees*



Refrigerant Leakage
Detector



High Air Flow
CFM - 700*



Auto On/Off
Timer



Backlit
Remote



Follow Me



CAI12IN3R34FO



CAI18IN3R34FO



CAI24IN3R32FO

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6900
	Cooling Capacity - Full / Half (W)	3450/1725	5050 / 2525	6300 / 3150
	Power Input - Full / Half (W)	1055/443	1590 / 615	2000 / 765
	Annual Power Consumption (kWh)	694.06	999.69	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.85	3.91	3.9
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333

**Rest
Assured**



OCTRA EXi

3 Star Inverter Series

Available Variants | 1 TR & 1.5 TR

FLEXI COOL
INVERTER TECHNOLOGY



6-in-1
FlexiCool
Remote



6-IN-1 AC
WITH
FLEXI COOL
INVERTER TECHNOLOGY

6 modes,
up to 50% energy
saving.



**AUTO
CLEANSER**

Disinfects and
cleans the indoor
unit.



**INTELLIGENT
CRF ALERT**

Notifies you to
clean filters.




Hidden
Display



Dry Mode



Backlit
Remote



**REFRIGERANT
LEAKAGE DETECTOR**

Smart system detects and
safeguards the AC.



FOLLOW ME

Quicker and
targeted cooling
around remote.



Auto Swing



Double
Drain



High Air Flow
CFM - 450*



Auto On/Off
Timer



**AIR DIRECTIONAL
CONTROL**

Precisely direct airflow
for optimal cooling
distribution.



**HYDRO
BLUE COATING***

Protects coil and fin
against corrosion and
increases durability.



CAI12OC3R34FO



CAI18OC3R34FO

	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5350
	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.88	3.85
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement. *4Way swing Option also available in octra series.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



KURVE EXi

3 Star Inverter Series

Available Variants | 1 TR & 1.5 TR


6-in-1
FlexiCool
Remote




FLEXI COOL
INVERTER TECHNOLOGY



6-IN-1 AC
WITH
FLEXI COOL
INVERTER TECHNOLOGY
6 modes,
up to 50% energy
saving.



**REFRIGERANT
LEAKAGE DETECTOR**
Smart system detects
and safeguards the AC.



HD FILTER
Gives cleaner
and pure air.



**AUTO
CLEANSER**
Disinfects and
cleans the indoor
unit.



**INTELLIGENT
CRF ALERT**
Notifies you to
clean filters.




FOLLOW ME
Quicker and
targeted cooling
around remote.




**AIR DIRECTIONAL
CONTROL**
Precisely direct airflow
for optimal cooling
distribution.




Hidden
Display




Dry Mode



Auto
Restart



Auto Swing



Double
Drain



High Air Flow
CFM - 450*



Auto On/Off
Timer



Stabilizer Free
Even At 48 Degrees*



CAI12KU3R34F0



CAI18KU3R34F0

	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5350
	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.88	3.85
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement. *4Way swing Option also available in Kurve series.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





Indus **HOT & COLD**

3 Star Inverter Series

Available Variant | 1.5 TR

6-IN-1 AC

WITH
FLEXI COOL
HYBRIDJET TECHNOLOGY



ANTI-VIRAL GUARD*

Protects against air borne viruses, bacteria, and germs.



SLEEP MODE

Automatically switches off the unit after 7 hours.



INSTA COOL

Instant cooling with a single click.



6-IN-1 AC

WITH
FLEXI COOL
HYBRIDJET TECHNOLOGY

6 modes, up to 50% energy saving.



0.8 KW

SMART ENERGY DISPLAY

Shows real power consumption.



HEATING & COOLING

Hot & Cold airflow for all your comfort



HYDRO BLUE COATING*

Protects coil and fin against corrosion and increases durability.



HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.
*Patented technology



Hidden Display



Air Directional Control



Auto Restart



Backlit Remote



Refrigerant Leakage Detector



Stabilizer Free Even At 48 Degrees*



Auto On/Off Timer



Follow Me



CA181N3R33H0

	TONNAGE CATEGORY	1.5 TR
Performance	Cooling Capacity Max (W)	5760
	Cooling Capacity - Full / Half (W)	5100/2550
	Heating Capacity (W)	5000
	Power Input - Full / Half (W)	1540/618
	Annual Power Consumption (kWh)	988.04
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	4
	Valve Size (Inch)	1/2 x 1/4

*T&C Apply. 685 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.
Working range : 0deg C to 55deg C in Indus H&C



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333



NOVELLO 365

3 Star HOT & COLD AC

Available Variants | 1.5 TR



R32



TURBO MODE

Brings down the temperature rapidly.



HYDRO BLUE COATING*

Protects fin against corrosion and increases durability.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



HEATING & COOLING

Hot & Cold airflow for all your comfort




HIGH AIRTHROW 630 CFM

Precisely direct airflow for optimal cooling distribution.




SLEEP MODE

Automatically switches off the unit after 7 hours.




HD FILTER

Quicker and targeted cooling around remote.



Auto Swing




Dry Mode



Air Directional Control




Sleep Mode



Double Drain



Louver Position Memory



Auto On/Off Timer



Stabilizer Free Even At 48 Degrees*



CAI18NO3R32HO

	TONNAGE CATEGORY	1.5 TR
Performance	Cooling Capacity Max (W)	5910
	Cooling Capacity - Full / Half (W)	5300/2650
	Heating Capacity (W)	5300/2650
	Power Input - Full / Half (W)	1583/580
	Annual Power Consumption (kWh)	966.34
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	4.25
	Valve Size (Inch)	1/2 x 1/4

*T&C Apply. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement. Working range : -10deg C to 52deg C in Novello H&C



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



DURAWHITE EXi


5 Star Inverter Series

Available Variants | 1 TR, 1.5 TR & 2 TR

6-in-1
FlexiCool
Remote




FLEXI COOL
INVERTER TECHNOLOGY

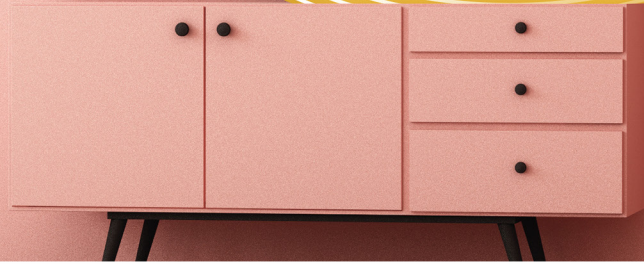

6-IN-1 AC

WITH
FLEXI COOL
INVERTER TECHNOLOGY

6 modes,
up to 50% energy
saving.



**REFRIGERANT
LEAKAGE DETECTOR**

Smart system detects and
safeguards the AC.



PM 2.5 FILTER

Gives cleaner
and pure air.



**AUTO
CLEANSER**

Disinfects and
cleans the indoor
unit.



**INTELLIGENT
CRF ALERT**

Notifies you to
clean filters.



FOLLOW ME

Quicker and targeted
cooling around
remote.



**HYDRO
BLUE COATING***

Protects coil and fin
against corrosion and
increases durability.



**HIGH AMBIENT
WORKING**

Works in high
temperature
up to 52°C.



**LED 7 Segment
Display**



**Air Directional
Control**



**Auto On/Off
Timer**



**High Air Flow
CFM - 700***



**Auto
Swing**



**Stabilizer Free
Even At
48 Degrees***



**Double
Drain**



**Backlit
Remote**



CAI12DH5R34F0



CAI18DH5R34F0



CAI24DH5R34F0

	TONNAGE CATEGORY	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity Max (W)	4080	5760	6580
	Cooling Capacity - Full / Half (W)	3500 / 1750	5000 / 2500	6000 / 3000
	Power Input - Full / Half (W)	840 / 334	1260 / 445	1500 / 555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.13	5.05
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



DURAWHITE EXi

3 Star Inverter Series

Available Variants | 2 TR

6-in-1
FlexiCool
Remote



FLEXI COOL
INVERTER TECHNOLOGY



6-IN-1 AC
WITH
FLEXI COOL
INVERTER TECHNOLOGY
6 modes,
up to 50% energy
saving.



**REFRIGERANT
LEAKAGE DETECTOR**
Smart system detects and
safeguards the AC.



PM 2.5 FILTER
Gives cleaner
and pure air.



**AUTO
CLEANSER**
Disinfects and
cleans the indoor
unit.



**INTELLIGENT
CRF ALERT**
Notifies you to
clean filters.



FOLLOW ME
Quicker and targeted
cooling around
remote.



**HYDRO
BLUE COATING***
Protects coil and fin
against corrosion and
increases durability.



**HIGH AMBIENT
WORKING**
Works in high
temperature
up to 52°C.



**LED 7 Segment
Display**




**Air Directional
Control**



**Auto On/Off
Timer**




**High Air Flow
CFM - 700***




**Auto
Swing**



**Stabilizer Free
Even At
48 Degrees***



**Double
Drain**



**Backlit
Remote**



CAI24DH3R32F0

	TONNAGE CATEGORY	2 TR
Performance	Cooling Capacity Max (W)	6900
	Cooling Capacity - Full / Half (W)	6300/3150
	Power Input - Full / Half (W)	2000/765
	Annual Power Consumption (kWh)	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.9
	Valve Size (Inch)	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



DURAWHITE PRO+ EXi

3 Star Inverter Series

Available Variants | 1 TR & 1.5 TR



6-in-1
FlexiCool
Remote




FLEXI COOL
INVERTER TECHNOLOGY



6-IN-1 AC

WITH
FLEXI COOL
INVERTER TECHNOLOGY

6 modes,
up to 50% energy
saving.



**REFRIGERANT
LEAKAGE DETECTOR**

Smart system detects and
safeguards the AC.



FOLLOW ME

Quicker and targeted
cooling around
remote.



**AUTO
CLEANSER**

Disinfects and
cleans the indoor
unit.



**INTELLIGENT
CRF ALERT**

Notifies you to
clean filters.



**HYDRO
BLUE COATING***

Protects coil and fin
against corrosion and
increases durability.



**HIGH AMBIENT
WORKING**

Works in high
temperature
up to 52°C.



24°C

Hidden
Display




**Air Directional
Control**



**Auto On/Off
Timer**




**High Air Flow
CFM - 450***



**Auto
Swing**



**Stabilizer Free
Even At
48 Degrees***



**Double
Drain**



**Backlit
Remote**



CAI12DR3R33F0



CAI18DR3R34F0

	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity Max (W)	4080	5350
	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.88	3.85
	Valve Size (Inch)	3/8 x 1/4	1/2 x 1/4

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.

Carrier/01-24



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333






FIXED SPEED

— ACs —



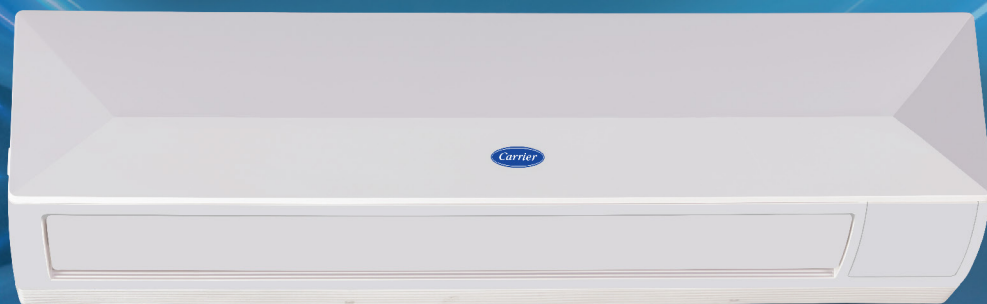


XTREME EDGE EX

3 Star Fixed Speed

Available Variant | 1 TR & 1.5 TR



HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.



HD FILTER
Gives cleaner and pure air.



HIGH AMBIENT WORKING
Works in high temperature up to 52°C.



AUTO CLEANSER
Disinfects and cleans the indoor unit.



INTELLIGENT CRF ALERT
Notifies you to clean filters.



High Air Flow
CFM - 715*



Hydro Corrosion
Coating (Blue)



Air Directional
Control



Auto
Restart



Auto Swing



Hidden
Display



Auto On/Off
Timer



Dry Mode



	TONNAGE CATEGORY	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5350
	Power Input (W)	940	1395
	Annual Power Consumption (kWh)	727.66	1079.88
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.83	3.84
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4

*T&C Apply. 715 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com




Carrier Care: 1800 103 3333



DURAWHITE PRO+ EX

3 Star Fixed Speed

Available Variants | 1 TR & 1.5 TR



HD FILTER

Gives cleaner and pure air.



HIGH AMBIENT WORKING

Works in high temperature up to 52°C.



AUTO CLEANSER

Disinfects and cleans the indoor unit.



HYDRO BLUE COATING*


Protects coil and fin against corrosion and increases durability.




Hidden Display




Air Directional Control



Dry Mode




High Air Flow
CFM - 700*



Auto Swing



Auto On/Off Timer



Double Drain



Turbo Mode



CAS12DP3R32F1



CAS18DP3R32F0

Performance	TONNAGE CATEGORY	1 TR	1.5 TR
	Cooling Capacity (W)	3600	5200
	Power Input (W)	940	1350
	Annual Power Consumption (kWh)	727.66	1045.04
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.83	3.85
	Valve Size (Inch)	1/2 x 1/4	1/2 x 1/4

*T&C Apply. 700 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333




Carrier/01-24

DURAWHITE EX

3 Star Fixed Speed

Available Variants | 2 TR



REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.



HD FILTER
Gives cleaner and pure air.



FOLLOW ME
Quicker and targeted cooling around remote.



AUTO CLEANSER
Disinfects and cleans the indoor unit.



INTELLIGENT CRF ALERT
Notifies you to clean filters.



HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.



HIGH AMBIENT WORKING
Works in high temperature up to 52°C.



Double Drain



Air Directional Control



Auto On/Off Timer



High Air Flow CFM ~ 700*



Auto Swing



Backlit Remote



	TONNAGE CATEGORY	2 TR
Performance	Cooling Capacity - Full / Half (W)	6050
	Power Input - Full / Half (W)	1570
	Annual Power Consumption (kWh)	1215.35
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.85
	Valve Size (Inch)	5/8 x 1/4

*T&C Apply. 700 CFM only applicable on 2 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.




www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



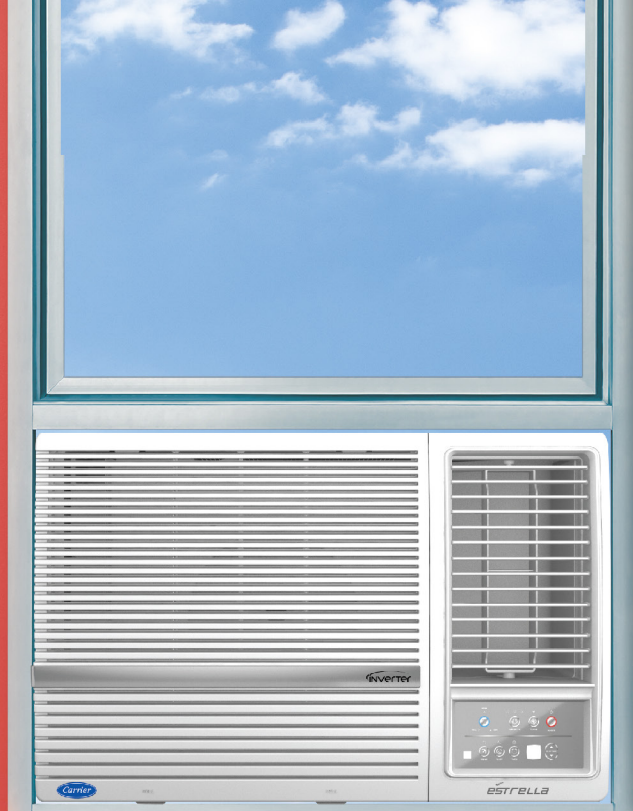

WINDOW


— ACs —



ESTRELLA EXI

3 & 5 Star Inverter Series


Available Variants | 1.5 TR



HIGH AMBIENT WORKING
Works in high temperature up to 52°C.



HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.



DUST FILTER
High-efficient cooling and assured durability.



TURBO MODE
Brings down the temperature rapidly.



ENERGY SAVER MODE
Right temperature at low power bill.



AIR DIRECTIONAL CONTROL
Protects fin against corrosion and increases durability.



Dry Mode



Auto Swing



Auto Restart



Sleep Mode



Auto Restart



	TONNAGE CATEGORY	1.5 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5000/2500	5150/2575
	Power Input - Full / Half (W)	1760/800	1640/730
	Annual Power Consumption (kWh)	1210.35	1114.62
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.2	3.58

*T&C Apply. 480 CFM only applicable on 1.5 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



ESTRELLA EXi (E)

5 Star Inverter Series


Available Variants | 1.5 TR



HIGH AMBIENT WORKING
Works in high temperature up to 52°C.



HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.



DUST FILTER
High-efficient cooling and assured durability.



TURBO MODE
Brings down the temperature rapidly.



ENERGY SAVER MODE
Right temperature at low power bill.



SLEEP MODE
Automatically switches off the unit after 7 hours.



Air Directional Control



Stabilizer Free Even At 48 Degrees*



Auto Restart



Auto Swing



CIW18EC5R33F1

	TONNAGE CATEGORY	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5070/2535
	Power Input (W)	1620 / 725
	Annual Power Consumption (kWh)	1104.37
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.55

*T&C Apply. 450 CFM only applicable on 1.5 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





ESTRELLA EX

3 Star Fixed Speed


Available Variants | 1 TR



AIR DIRECTIONAL CONTROL
Protects fin against corrosion and increases durability.



HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.



DUST FILTER
High-efficient cooling and assured durability.



TURBO MODE
Brings down the temperature rapidly.



ENERGY SAVER MODE
Right temperature at low power bill.



HIGH AMBIENT WORKING
Works in high temperature up to 50°C.



Dry Mode




Auto Swing



Auto Restart



Sleep Mode



Auto Restart



	TONNAGE CATEGORY	1 TR
Performance	Cooling Capacity (W)	3300
	Power Input (W)	1050
	Annual Power Consumption (kWh)	812.81
	Label Period	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.14

*T&C Apply. 300 CFM only applicable on 1 TR model. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333



ESTRELLA EX

3 Star Fixed Speed


Available Variants | 1.5 TR & 2 TR



HIGH AMBIENT WORKING
Works in high temperature up to 50°C.



HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.



DUST FILTER
High-efficient cooling and assured durability.



TURBO MODE
Brings down the temperature rapidly.



ENERGY SAVER MODE
Right temperature at low power bill.



AIR DIRECTIONAL CONTROL
Protects fin against corrosion and increases durability.



Dry Mode



Auto Swing



Auto Restart



Sleep Mode



Auto On/Off Timer



CAW18EC3R32Fo



CAW24EC3R32Fo

	TONNAGE CATEGORY	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	5000	6000
	Power Input - Full / Half (W)	1558	1875
	Annual Power Consumption (kWh)	1206.06	1451.45
	Label Period	1st July 2022 - 31st Dec 2024	1st July 2022 - 31st Dec 2024
	ISEER Value (W/W)	3.21	3.2

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333



Specification table for Inverter AC Series.

	PARAMETER	XCEL EDGE EXi	XCEL EDGE EXi	XCEL EDGE EXi	XCEL EDGE EXi Wifi	XCEL EDGE EXi Wifi	XCEL EDGE EXi Wifi
General	Model No.	CAI12CE3R34F0	CAI18CE3R34F0	CAI24CE3R34F0	CAI12CE5R34F0	CAI18CE5R34F0	CAI24CE5R34F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Full Load Capacity (Watts)	3450	5050	6300	3500	5000	6000
	Half Load Capacity (Watts)	1725	2525	3150	1750	2500	3000
	Full Load Power Input* (Watts)	1055	1590	2000	840	1260	1500
	Half Load Power Input* (Watts)	443	615	765	334	445	555
	Annual Power Consumption (KWH)	694.06	999.69	1249.82	536.2	754.05	920.55
	Label Period	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.85	3.91	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	7.0	8.8	3.8	5.5	TBD
	Net Weight (Kgs(IDU/ODU))	8.4/ 22	10.3 / 25.5	14 / 28	8.4 / 26	10.3 / 27.1	14 / 40
	Air Flow Rate (CFM)	375	580	700	380	580	700
	Indoor Noise Level (H/m/l) (dB)	40/38/32	42/40/37	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4	4	4
Overall Size	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	12	2.0	2.4	1.2	2.0	2.4
	Indoor Unit (Height) (mm)	275	275	315	275	275	315
	Indoor Unit (Width) (mm)	800	940	1045	800	940	1045
	Indoor Unit (Depth) (mm)	188	205	235	188	205	235
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
Filters	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(Avg) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA	NA
Features	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
	Hybridjet Grill	YES	YES	YES	YES	YES	YES
	Turbo Mode	NA	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes	Yes	Yes
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	YES	Yes	Yes
	Insta Cool	YES	YES	YES	YES	Yes	Yes
	Wi Fi (Optional)	NA	NA	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA	NA	NA
	Refrigerant Cooling PcB	NA	NA	YES	NA	NA	YES
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	55°C	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes	Yes	Yes
	Kw Display	KW display	KW display	KW display	KW display	KW display	KW display
	X-LED I-series						
	New X-LED Vbl	NA	NA	NA	NA	NA	NA

	Parameter	XCEL LUMO EXi	XCEL LUMO EXi	XCEL LUMO EXi	XCEL LUMO EXi Wifi	XCEL LUMO EXi Wifi	XCEL LUMO EXi Wifi
General	Model No.	CAI12CL3R34F0	CAI18CL3R34F0	CAI24CL3R34F0	CAI12CL5R34F0	CAI18CL5R34F0	CAI24CL5R34F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Full Load Capacity (Watts)	3450	5050	6300	3500	5000	6000
	Half Load Capacity (Watts)	1725	2525	3150	1750	2500	3000
	Full Load Power Input* (Watts)	1055	1590	2000	840	1260	1500
	Half Load Power Input* (Watts)	443	615	765	334	445	555
	Annual Power Consumption (KWH)	694.06	999.69	1249.82	536.2	754.05	920.55
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.85	3.91	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	7.0	8.8	3.8	5.5	TBD
	Net Weight (Kgs(IDU/ODU))	8.4/ 22	10.3 / 25.5	14 / 28	8.4 / 26	10.3 / 27.1	14 / 40
	Air Flow Rate (CFM)	375	580	700	380	580	700
	Indoor Noise Level (H/m/l) (dB)	40/38/32	42/40/37	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4	4	4
Overall Size	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	12	2.0	2.4	1.2	2.0	2.4
	Indoor Unit (Height) (mm)	275	275	315	275	275	315
	Indoor Unit (Width) (mm)	800	940	1045	800	940	1045
	Indoor Unit (Depth) (mm)	188	205	235	188	205	235
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
Filters	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	YES	YES	YES	YES
	Ag+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA	NA
Features	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
	Hybridjet Grill	YES	YES	YES	YES	YES	YES
	Turbo Mode	NA	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes	Yes	Yes
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	YES	Yes	Yes
	Insta Cool	YES	YES	YES	YES	Yes	Yes
	Wi Fi (Optional)	NA	NA	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA	NA	NA
	Refrigerant Cooling PcB	NA	NA	YES	NA	NA	YES
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	55°C	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes	Yes	Yes
	Kw Display	KW display	KW display	KW display	KW display	KW display	KW display
	X-LED I-series						
	New X-LED Vbl	YES	YES	YES	YES	YES	YES

	Parameter	INDUS EXi	INDUS EXi	INDUS EXi	INDUS EXi SMART	INDUS EXi SMART	INDUS EXi SMART
General	Model No.	CAI12IN3R34F0	CAI18IN3R34F0	CAI24IN3R32F0	CAI12IN5R34W0	CAI18IN5R34W0	CAI24IN5R34W0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Full Load Capacity (Watts)	3450	5050	6300	3500	5230	6000
	Half Load Capacity (Watts)	1725	2525	3150	1750	2615	3000
	Full Load Power Input* (Watts)	1055	1590	2000	840	1290	1500
	Half Load Power Input* (Watts)	443	615	765	334	475	555
	Annual Power Consumption (KWH)	694.06	999.69	1249.82	536.2	789.6	920.55
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.85	3.91	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	7.0	8.8	3.8	5.8	TBD
	Net Weight (Kgs(IDU/ODU))	8.4 / 22	10.3 / 25.5	14 / 28	8.4 / 26	12.2 / 27.1	14 / 40
	Air Flow Rate (CFM)	400	580	700	380	685	700
	Indoor Noise Level (H/m/l) (dB)	40/38/32	42/40/37	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4	4	4
Overall Size	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	12	2.0	2.4	1.2	2.0	2.4
	Indoor Unit (Height) (mm)	282	275	320	275	324	320
	Indoor Unit (Width) (mm)	798	940	1046	800	965	1046
	Indoor Unit (Depth) (mm)	192	205	240	188	234	240
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
Filters	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	NA	NA	NA	NA	NA	NA
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	YES	YES	YES	YES	YES	YES
Features	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
	Hybridjet Grill	YES	YES	YES	YES	YES	YES
	Turbo Mode	NA	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes	Yes	Yes
	IDUTemp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	YES	Yes	Yes
	Insta Cool	YES	YES	YES	YES	Yes	Yes
	Wi Fi (Optional)	NA	NA	NA	YES	YES	YES
	Google Action (Optional)	NA	NA	NA	YES	YES	YES
	Amazon Alexa (Optional)	NA	NA	NA	YES	YES	YES
	Refrigerant Cooling PcB	NA	NA	YES	NA	Yes	Yes
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	55°C	55°C	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes	Yes	Yes
	Kw Display	KW display	KW display	KW display	KW display	KW display	KW display
	X- LED-series						
	New X-LED Vbl	NA	NA	NA	NA	NA	NA

	Parameter	DURAWHITE PRO+ Exi	DURAWHITE PRO+ Exi	DURAWHITE Exi	DURAWHITE Exi	DURAWHITE Exi	DURAWHITE Exi
General	Model No.	CAI12DR3R33F0	CAI18DR3R34F0	CAI24DH3R32F0	CAI12DH5R34F0	CAI18DH5R34F0	CAI24DH5R34F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5	2.0
	Full Load Capacity (Watts)	3530	4800	6300	3500	5000	6000
	Half Load Capacity (Watts)	1765	2400	3150	1750	2500	3000
	Full Load Power Input* (Watts)	1055	1575	2000	840	1260	1500
	Half Load Power Input* (Watts)	455	580	765	334	445	555
	Annual Power Consumption (KWH)	704.46	964.1	1249.82	536.2	754.05	920.55
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	5 Star	5 Star	5 Star
	ISEER Value (W/W)	3.88	3.85	3.9	5.05	5.13	5.05
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	8.8	3.8	5.5	TBD
	Net Weight (Kgs(IDU/ODU))	9.5 / 22	10 / 25.5	14 / 28	8.4 / 26	10.3 / 27.1	14 / 40
	Air Flow Rate (CFM)	400	450	700	380	580	700
	Indoor Noise Level (H/m/l) (dB)	40/38/32	40/38/32	46/44/39	40/38/32	44/42/38	46/44/38
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4	4	4
Overall Size	With Connecting Kit Pipe	YES	YES	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"
	Moisture Removal Rate (Kg/Hr)	12	2.0	2.4	1.2	2.0	2.4
	Indoor Unit (Height) (mm)	270	270	315	275	275	315
	Indoor Unit (Width) (mm)	850	850	1045	800	940	1045
	Indoor Unit (Depth) (mm)	220	220	235	188	205	235
	Outdoor Unit (Height) (mm)	540	540	540	540	540	700
Filters	Outdoor Unit (Width) (mm)	780	790	790	790	790	845
	Outdoor Unit (Depth-with Grill) (mm)	265	280	280	280	280	335
	HD Filter	YES	YES	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	NA	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA	NA
Features	Cold Catalyst Filter	NA	NA	NA	NA	NA	NA
	Hybridjet Grill	NA	NA	NA	NA	NA	NA
	Turbo Mode	Yes	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes	Yes	Yes
	IDU Temp Display	Hidden Display	Hidden Display	LED Display	LED Display	LED Display	LED Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	YES	Yes	Yes
	Insta Cool	YES	YES	YES	YES	Yes	Yes
	Wi Fi (Optional)	NA	NA	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA	NA	NA
	Refrigerant Cooling PcB	NA	NA	YES	NA	NA	YES
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	52°C	52°C	52°C	52°C	52°C	52°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes	Yes	Yes
	kw Display	NA	NA	NA	NA	NA	NA
	x-LED I-series						
	new X-LED Vbl	NA	NA	NA	NA	NA	NA

	Parameter	OCTRA Exi+	OCTRA Exi+	KURVE Exi+	KURVE Exi+
General	Model No.	CAI12OC3R33F0	CAI18OC3R34F0	CAI12KU3R33F0	CAI18KU3R34F0
	Tonnage Category (TR)	1.0	1.5	1.0	1.5
	Full Load Capacity (Watts)	3530	4800	3530	4800
	Half Load Capacity (Watts)	1765	2400	1765	2400
	Full Load Power Input* (Watts)	1055	1575	1055	1575
	Half Load Power Input* (Watts)	455	580	455	580
	Annual Power Consumption (KWH)	704.46	964.1	704.46	964.1
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022- 31 st Dec,2024	1 st July,2022- 31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	3 Star
	ISEER Value (W/W)	3.88	3.85	3.88	3.85
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	4.6	6.9
	Net Weight (Kgs(IDU/ODU))	9.5/ 22	10 / 25.5	9.5 / 22	10 / 25.5
	Air Flow Rate (CFM)	400	450	400	450
	Indoor Noise Level (H/m/l) (dB)	40/38/32	40/38/32	40/38/32	40/38/32
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4
Overall Size	With Connecting Kit Pipe	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	1.2	2.0
	Indoor Unit (Height) (mm)	270	270	270	270
	Indoor Unit (Width) (mm)	850	850	850	850
	Indoor Unit (Depth) (mm)	220	220	220	220
	Outdoor Unit (Height) (mm)	540	540	540	540
Filters	Outdoor Unit (Width) (mm)	780	790	780	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	265	280
	HD Filter	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	NA	YES	NA
	AG+ Nano Filter	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA
Features	Cold Catalyst Filter	NA	NA	NA	NA
	Hybridjet Grill	NA	NA	NA	NA
	Turbo Mode	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	YES
	Insta Cool	YES	YES	YES	YES
	Wi Fi (Optional)	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA
	Refrigerant Cooling PcB	NA	NA	NA	NA
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	52°C	52°C	52°C	52°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes
	Kw Display	NA	NA	NA	NA
	X-LED I-series				
	New X-LED Vbl	NA	NA	NA	NA

	Parameter	XTREME EDGE EXi	XTREME EDGE EXi	XTREME EDGE EXi	XTREME EDGE EXi
General	Model No.	CAI12XE3R34FO	CAI18XE3R34FO	CAI12XE5R33FO	CAI18XE5R34FO
	Tonnage Category (TR)	1.0	1.5	1.0	1.5
	Full Load Capacity (Watts)	3450	5150	3450	5200
	Half Load Capacity (Watts)	1725	2575	1725	2600
	Full Load Power Input* (Watts)	1065	1610	850	1290
	Half Load Power Input* (Watts)	430	650	323	475
	Annual Power Consumption (KWH)	685.59	1036.39	529.28	789.6
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022- 31 st Dec,2024	1 st July,2022- 31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	5 Star	5 Star
	ISEER Value (W/W)	3.9	3.85	5.05	5.1
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	3.7	5.7
	Net Weight (Kgs;(IDU/ODU))	9.3/ 22	11 / 25.5	9.3 / 26	11.3 / 27.1
	Air Flow Rate (CFM)	430	715	430	695
	Indoor Noise Level (H/m/l) (dB)	40/38/32	42/40/38	40/38/32	42/40/38
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4
	With Connecting Kit Pipe	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"
Overall Size	Moisture Removal Rate (Kg/Hr)	1.2	2.0	1.2	2.0
	Indoor Unit (Height) (mm)	295	295	295	295
	Indoor Unit (Width) (mm)	804	1000	804	1000
	Indoor Unit (Depth) (mm)	200	230	200	230
	Outdoor Unit (Height) (mm)	540	540	540	540
	Outdoor Unit (Width) (mm)	780	790	780	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	265	280
Filters	HD Filter	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA
	(Avg) Antiviral Guard Coated Filter	NA	NA	NA	NA
	Cold Catalyst Filter	NA	NA	NA	NA
	Hybridjet Grill	YES	YES	YES	YES
Features	Turbo Mode	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes
	Idu Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes
	Intelligent Crf Alert	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	Yes
	Insta Cool	YES	YES	YES	Yes
	Wi Fi (Optional)	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA
	Refrigerant Cooling PcB	NA	NA	NA	NA
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes
	Kw Display	NA	NA	NA	NA
	X-LED I-series				
	New X-LED Vbl	NA	NA	NA	NA

	Parameter	XTREME LUMO EXi	XTREME LUMO EXi	XTREME LUMO EXi	XTREME LUMO EXi
General	Model No.	CAI12XL3R34FO	CAI18XL3R34FO	CAI12XL5R33FO	CAI18XL5R34FO
	Tonnage Category (TR)	1.0	1.5	1.0	1.5
	Full Load Capacity (Watts)	3450	5150	3450	5200
	Half Load Capacity (Watts)	1725	2575	1725	2600
	Full Load Power Input* (Watts)	1065	1610	850	1290
	Half Load Power Input* (Watts)	430	650	323	475
	Annual Power Consumption (KWH)	685.59	1036.39	529.28	789.6
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022- 31 st Dec,2024	1 st July,2022- 31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	5 Star	5 Star
	ISEER Value (W/W)	3.9	3.85	5.05	5.1
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.6	6.9	3.7	5.7
	Net Weight (Kgs;(IDU/ODU))	9.3/ 22	11 / 25.5	9.3 / 26	11.3 / 27.1
	Air Flow Rate (CFM)	430	715	430	695
	Indoor Noise Level (H/m/l) (db)	40/38/32	42/40/38	40/38/32	42/40/38
	Fan Motor (Indoor) (No. of Speeds)	4	4	4	4
Overall Size	With Connecting Kit Pipe	YES	YES	YES	YES
	Valve Size (Inch)	3/8" x 1/4"	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"
	Moisture Removal Rate (Kg/Hr)	1.2	2.0	1.2	2.0
	Indoor Unit (Height) (mm)	295	295	295	295
	Indoor Unit (Width) (mm)	804	1000	804	1000
	Indoor Unit (Depth) (mm)	200	230	200	230
	Outdoor Unit (Height) (mm)	540	540	540	540
Filters	Outdoor Unit (Width) (mm)	780	790	780	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	265	280
	HD Filter	YES	YES	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA	NA	NA
	PM 2.5 Micron Filter	YES	YES	YES	YES
	AG+ Nano Filter	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA
Features	Cold Catalyst Filter	NA	NA	NA	NA
	Hybridjet Grill	YES	YES	YES	YES
	Turbo Mode	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes
	Security Lock	Yes	Yes	Yes	Yes
	IDU Temp Display	Hidden Display	Hidden Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	Yes	Yes	Yes	Yes
	Louver Position Memory	NA	NA	NA	NA
	Dry Mode	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	Yes	Yes	Yes	Yes
	Auto Swing	Yes	Yes	Yes	Yes
	Auto Cleanser	Yes	Yes	Yes	Yes
	Follow Me	Yes	Yes	Yes	Yes
	Auto Mode	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes
	Double Drain (Easy Installation)	Yes	Yes	Yes	Yes
	Flexicool (4 In 1)	NA	NA	NA	NA
	Flexicool (6 In 1)	YES	YES	YES	Yes
	Insta Cool	YES	YES	YES	Yes
	Wi Fi (Optional)	NA	NA	NA	NA
	Google Action (Optional)	NA	NA	NA	NA
	Amazon Alexa (Optional)	NA	NA	NA	NA
	Refrigerant Cooling PCB	NA	NA	NA	NA
	My Mode (Favourite Mode)	Yes	Yes	Yes	Yes
	Temp Display On/Off	Yes	Yes	Yes	Yes
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	55°C	55°C	55°C	55°C
	Stabilizer Free Operation (Even @48°C)	Yes	Yes	Yes	Yes
	kw Display	NA	NA	NA	NA
	X-LED I-series	YES	YES	YES	YES
	New X-LED Vbl				

Specification table for Hot & Cold Inverter AC Series.

	Parameter	NOVELLO H&C	INDUS H&C
General	Model No.	CA118NO3R32H0	CA118IN3R33H0
	Tonnage Category (TR)	1.5	1.5
	Cooling Capacity (Full Load/half) (Watts)	5300 / 2650	5100 / 2550
	Heating Capacity (Full Load) (Watts)	5300 / 2650	5000
	Cooling Power Input (Full/half) (Watts)	1583 / 580	1540 / 618
	Heating Power Input (Full Load) (Watts)	1583 / 580	1540
	Annual Power Consumption cooling Only (KWH)	966.34	988.04
	Label Period	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star
	ISEER Value (W/W)	4.25	4
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	6.8	6.8
	Net Weight (Kgs(IDU/ODU))	11 / 36.5	12.2 / 26.5
	Air Flow Rate (CFM)		685
	Indoor Noise Level (H/m/l) (db)	49/46/43	49/46/43
	Fan Motor (Indoor) (No.of Speeds)	4	4
	With Connecting Kit Pipe	YES	YES
	Valve Size (Inch)	1/2" x 1/4"	1/2" x 1/4"
	MOISTURE REMOVAL RATE (Kg/Hr)	2.0	2.0
Overall Size	Indoor Unit (Height) (mm)	295	324
	Indoor Unit (Width) (mm)	1000	965
	Indoor Unit (Depth) (mm)	230	234
	Outdoor Unit (Height) (mm)	594	540
	Outdoor Unit (Width) (mm)	810	790
	Outdoor Unit (Depth-with Grill) (mm)	300	280
Filters	HD Filter	YES	YES
	PM 2.5 Micron Filter(3m Brand)	NA	NA
	PM 2.5 Micron Filter	NA	NA
	AG+ Nano Filter	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	YES
Features	Hybridjet Grill	NA	YES
	Turbo Mode	YES	NA
	Refrigerant	R32	R32
	Air Direction Control	YES	Yes
	Security Lock	YES	Yes
	IDU Temp Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote
	Remote Backlit	NA	Yes
	Auto Off Timer	YES	Yes
	Auto On Timer	YES	Yes
	Sleep Mode	YES	Yes
	refrigerant Leakage Detector	NA	Yes
	louver Position Memory	YES	NA
	Dry Mode	YES	Yes
	auto Fan Speed	YES	Yes
	intelligent CRF Alert	NA	Yes
	Auto Swing	YES	Yes
	Auto Cleanser	NA	Yes
	Follow Me	NA	Yes
	Auto Mode	YES	Yes
	Auto Restart	YES	Yes
	Double Drain (Easy Installation)	YES	Yes
	Flexicool (4 In 1)	NA	NA
	Flexicool (6 In 1)	NA	YES
	Insta Cool	NA	YES
	Wi Fi (Optional)	NA	NA
	Google Action (Optional)	NA	NA
	Amazon Alexa (Optional)	NA	NA
	Refrigerant Cooling PcB	NA	NA
	my Mode (Favourite Mode)	NA	Yes
	Temp Display On/Off	YES	Yes
	Clock	YES	NA
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side
	High Ambient Working	52 deg	55 deg
	Stabilizer Free Operation (Even @48°C)	YES	YES
	Operating Range	(-)10 deg / 52 Deg	0 deg / 55 Deg
	Kw Display	NA	KW display- Flexicool

Specification table for Fixed Speed AC Series.

	Parameter	Durawhite Pro+ Ex	Durawhite Pro+ Ex	Durawhite Ex	Xtreme Edge Ex	Xtreme Edge Ex
General	Model No.	CAS12DP3R32F1	CAS18DP3R32F0	CAS24DH3R33F0	CAS12XE3R33F0	CAS18XE3R33F0
	Tonnage Category (TR)	1.0	1.5	2.0	1.0	1.5
	Rated Capacity* (Watts)	3600	5200	6050	3600	5350
	Nominal Cooling/Heating Power Input* (KWH) (Watts)	940	1350	1570	940	1395
	Annual Power	727.66	1045.04	1215.35	727.66	1079.88
	Label Period	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024
	BEE Star Rating***	3 Star	3 Star	3 Star	3 Star	3 Star
	ISEER Value (W/W)	3.83	3.85	3.85	3.83	3.84
	Rated Power Supply (V-Ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
	Rated Amp (Amp)	4.1	5.9	6.9	4.1	6.1
	Net Weight (Kgs(IDU/ODU))	10 / 28	12 / 33.5	14 / 43.6	10 / 28	11 / 34
	Air Flow Rate (FCM)	400	700	700		715
	Indoor Noise Level (H/m/I) (dB)	39/35/32	44/42/38	46/44/40	40/38/32	39/35/32
	Fan Motor (Indoor) (No.of Speeds)	4	4	4	4	4
Overall Size	With Connecting Kit Pipe	Yes	Yes	Yes	Yes	Yes
	Valve Size (Inch)	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"
	Indoor Unit (Height) (mm)	270	320	315	295	295
	Indoor Unit (Width) (mm)	850	950	1045	804	1000
	Indoor Unit (Depth) (mm)	220	240	235	200	230
	Outdoor Unit (Height) (mm)	540	540	700	540	540
Filters	Outdoor Unit (Width) (mm)	780	790	845	780	790
	Outdoor Unit (Depth-with Grill) (mm)	265	280	335	265	280
	HD Filter	Yes	YES	Yes	Yes	Yes
	PM 2.5 Micron Filter (3m Brand)	NA	NA	NA	NA	NA
	PM 2.5 Micron Filter	NA	NA	Yes	NA	NA
	Air Cleaner (Composite Air Freshing Mesh)	NA	NA	NA	NA	NA
	AG+ Nano Filter	NA	NA	NA	NA	NA
Features	Hyper Protective Filter	NA	NA	NA	NA	NA
	(AVG) Antiviral Guard Coated Filter	NA	NA	NA	NA	NA
	Hybridjet Grill	NA	NA	NA	NA	NA
	Refrigerant	R32	R32	R32	R32	R32
	Air Direction Control	Yes	Yes	Yes	Yes	Yes
	Security Lock	NA	NA	Yes	NA	NA
	IDU Temp Display	Hidden Display	Hidden Display	LED Display	Hidden Display	Hidden Display
	Remote Control Type	LCD Remote	LCD Remote	LCD Remote	LCD Remote	LCD Remote
	Remote Backlit	NA	NA	Yes	NA	NA
	Auto Off Timer	Yes	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes	Yes
	Economic Sleep Mode	Yes	Yes	Yes	Yes	Yes
	Refrigerant Leakage Detector	NA	NA	Yes	NA	NA
	Louver Position Memory	Yes	Yes	NA	Yes	Yes
	Dry Mode	Yes	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes	Yes
	Intelligent CRF Alert	NA	NA	Yes	NA	NA
	Auto Swing	Yes	Yes	Yes	Yes	Yes
	Auto Cleanser (Self Clean)	Yes	Yes	Yes	Yes	Yes
	Follow Me	NA	NA	Yes	NA	NA
	Auto Mode	Yes	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes	Yes
	Turbo Mode	Yes	Yes	Yes	Yes	Yes
	double Drain (Easy Installation)	Yes	Yes	Yes	Yes	Yes
	Manual On/Off Button	Yes	Yes	Yes	Yes	Yes
	My Mode (Favourite Mode)	NA	NA	Yes	NA	NA
	High Ambient Working (At 230v Rated)	52°C	52°C	52°C	52°C	52°C
	IDU Display On/Off	Yes	Yes	Yes	Yes	Yes
	Summer Chill	Yes	Yes	NA	NA	NA
	Silent	Yes	Yes	NA	NA	NA
	4-way Swing	NA	NA	NA	NA	NA
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in sideat	Evap- Hair pin in sideee	Evap- Hair pin in side

Specification table for Window AC Series.

	Parameter	ESTRELLA EXi	ESTRELLA Ex	ESTRELLA Ex	ESTRELLA Ex	ESTRELLA Ex	ESTRELLA Ex
General	Model No.	CIW18EC5R32FO	CIW18EC5R33FI	CIW18EC3R34FO	CAW12EC3R34FO	CAW18EC3R32FO	CAW24EC3R32FO
	Tonnage Category (TR)	1.5	1.5	1.5	1.0	1.5	2.0
	Label Period	-	-	-	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024
	BEE Star Rating***	5 Star	5 Star	3 Star	3 Star	3 Star	3 Star
	Rated Capacity* (Watts)	-	-	-	3300	5000	6000
	Nominal Power Input* (Watts)	-	-	-	1050	1558	1875
	Full Load Capacity	5150	5070	5000	-	-	-
	Half Load Capacity	2575	2535	2500	-	-	-
	Full Load Power Input*	1640	1620	1760	-	-	-
	Half Load Power Input*	730	725	800	-	-	-
	Annual Power Consumption (KWH)	1114.62	1104.37	1210.35	812.81	1206.06	1451.45
	ISEER Value (W/W)	3.58	3.55	3.2	3.14	3.21	3.2
	Rated Power Supply (Volts/Ph/Hz)	230 -1 - 50	230 -1 - 50	230 -1 - 50	230 -1 - 50	230 -1 - 50	230 -1 - 50
	Rated Current (Amp)	7.6	7.1	8	-	-	-
	Air Flow Rate (CFM)	480	450	470	300	430	430
Physical Aspects	Noise Level (H/m/l)	56/53/50	56/53/50	56/53/50	52/49/47	660	660
	Overall Height (mm)	430	430	430	375	700	770
	Overall Width (mm)	660	660	660	560	500	650
	Overall Depth (mm)	770	700	700	620	56/54/52	60/59/58
	Net Weight (Kg)	56	45	46	42	54	60.5
Filters	Fan Motor (# of speeds)	3	3	3	3	3	3
	Electrostatic Filter	NA	NA	NA	NA	NA	NA
	Zeolite Filter	NA	NA	NA	NA	NA	NA
	Charcoal / Active Carbon Filter	NA	NA	NA	NA	NA	NA
	Vitamin C Filter	NA	NA	NA	NA	NA	NA
Features	Dust Filter	Yes	Yes	Yes	Yes	Yes	Yes
	Air Direction	2 Way	2 Way	2 Way	2 Way	2 Way	2 Way
	Control Type	LCD Remote	LCD Remote	LCD Remote	Non LCD Remote	Non LCD Remote	Non LCD Remote
	Room Temperature Display	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Off Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Auto On Timer	Yes	Yes	Yes	Yes	Yes	Yes
	Sleep Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Dry Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Turbo Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Fan Speed	Yes	Yes	Yes	Yes	Yes	Yes
	Energy Saver Mode	Yes	Yes	Yes	Yes	Yes	Yes
	Exhaust Command	NA	NA	NA	Yes	NA	NA
	Smart Time Guard	NA	NA	NA	NA	NA	NA
	Auto Swing	Yes	Yes	Yes	Yes	Yes	Yes
	Auto Restart	Yes	Yes	Yes	Yes	Yes	Yes
	Refrigerant	R32	R32	R32	R32	R32	R32
	Flexicool (50% , 75% , 100% Power)	NA	NA	NA	-	-	-
	Wi Fi (Optional)	NA	NA	NA	-	-	-
	Google Action(Optional)	NA	NA	NA	-	-	-
	Amazon Alexa (Optional)	NA	NA	NA	-	-	-
	High Ambient Working	52°C	52°C	52°C	50°C	50°C	50°C
	stabilizer Free Operation (Even @48°c	Yes	Yes	Yes	-	-	-
	Anti Corrosion Coating (Blue)	Evap- Hair pin in side	Evap- Hair pin in sidein side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side	Evap- Hair pin in side



REASONS TO BUY CARRIER ROOM AIR CONDITIONERS



Smart Energy
Display



Anti-Viral
Guard*



Carrier
Smart Connect



Insta
Kool



High Ambient
Working
(At 55° C)



Hidden
Display



Auto
Swing




Intelligent
CRF Alert




Refrigerant
Leakage Detector



Stabilizer Free
Even At 48 Deg*



Hydro
Blue Coating*



Aqua Clear
Protection



Auto
Cleanser



34 Feet
Air Flow*



Air Directional
Control



Follow Me



My Mode



100%
Copper



Equipped With
5 Safety Sensors



Error Code
Indicator



*Terms and Conditions apply. Product specifications, features, and offers are subject to change without prior notice.
For detailed terms and conditions & validity period, please visit www.carriermideaIndia.com
Xtreme Lumo Registration Code 382679-001 | Xcel Lumo Registration Code 398592-001.





Images shown are for reference only, actual product may vary.
For private circulation only. This is not an advertisement.

Corporate Office:

CARRIER MIDEA INDIA PRIVATE LIMITED

1st Floor, Pearl Tower, Plot No - 51, Sector - 32, Gurgaon, Haryana - 122001

Factory:

CARRIER MIDEA INDIA

Plot No. A-5, SUPA-PARNER Industrial Area, Ahmednagar, Maharashtra, 414301

CARRIER CARE - 1800 103 3333

 <https://www.facebook.com/CarrierMideaAc>  <https://www.instagram.com/carriermideaindia>

 <https://www.twitter.com/CarrierMideaInd>

Disclaimer: As a continuing policy of product innovation at Carrier, the design and specifications are subject to change without prior notice.
The visuals of the products in the brochure are representative only, actual products might differ from the ones shown.

'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life'. For more details kindly visit our website: www.carriermideaindia.com or contact Carrier care: 1800 103 3333